

2nd **NICTE**

NOMMENSEN INTERNATIONAL CONFERENCE
ON TECHNOLOGY AND ENGINEERING



CERTIFICATE OF APPRECIATION

is awarded to

AGUSTINUS

In recognition of valuable contribution as

PRESENTER

in the 2nd Nommensen International Conference on Technology and Engineering
19-20 July 2018, Medan, Indonesia



Dr. Richard AM. Napitupulu
Chairman

2nd NICTE

Nommensen International Conference
on Technology and Engineering



"SUSTAINABLE ENGINEERING AND TECHNOLOGY INNOVATION AND APPLICATION"

2nd Call For Papers

Accepted papers will be published in
the Material Science and Engineering
IOP Conferences Series
Indexed by ISI Web Science, Scopus, etc

KEYNOTE SPEAKERS :

Prof. David Herak
CULS, Czech Republic



Prof. Dr. Badorul Hisham Abu Bakar
USM, Malaysia



Prof. Shyh Leh Chen
CCU Taiwan



Dr. Himsar Ambarita
USU, Indonesia



Prof. Katsumi Suzuki, Ph.D
Shizouka University, Japan



TOPIC OF INTEREST (Not Limited)

- ✓ Civil and Environmental Engineering
- ✓ Mechanical Engineering and Technology
- ✓ Electrical Engineering
- ✓ Material Sciences and Engineering
- ✓ Food and Agriculture Technology
- ✓ Informatic Engineering & Technologies
- ✓ Medical & Health Technology

19-20 Juli 2018

Venue : Murni Sadar Hall,
Nommensen HKBP
University Campus
Medan, Indonesia

IMPORTANT DATES (Deadlines)

- ✓ Full Paper Submission : 4 June 2018
- ✓ Acceptance Notification : 27 June 2018
- ✓ Early Bird Payment : 15 May 2018
- ✓ Camera Ready With Payment (Normal Rate) : 2 July 2018
- ✓ Conference Day : 19-20 Juli 2018

REGISTRATION FEE

Indonesia Participants Student

Before 15th May 2018: IDR 1,500,000
After 15th May 2018 : IDR 2,000,000

Researchers/Others

Before 15th May 2018: IDR 2,000,000
After 15th May 2018 : IDR 2,500,000

International Participants: Student

Before 15th May 2018: USD 200
After 15th May 2018 : USD 250

Researchers/Others

Before 15th May 2018: USD 250
After 15th May 2018 : USD 300

COMMITTEE

Honorary Chair : Ir. Nurdin Tampubolon, MM
Dr. Ir. Sabam Malau

International Advisory Board :

- Prof. Menghui Li, CYCU - Taiwan
- Prof. Cheng Yuan Chang, CYCU - Taiwan
- Prof. Yupiter H.P. Mananung, UTM - Malaysia
- Assoc. Prof. Jiri Masek, CULS - Czech Republic
- Prof. Dr. Agusinus Purnawan, UNTAR - Indonesia

Chairman : Dr. Richard A. M. Napitupulu

Co-Chairman : Dr. Sindak Hutauruk

Editorial Board :

- Assoc. Prof. Petr Valasek, CULS - Czech Republic
- Ing. Abraham Kabutay Ph.D, Culs - Czech Republic
- Doc. Ing. Michal Petru, Ph.D, TUL - Czech Republic
- Assoc. Prof. Dr. Gurkan A. K. Gundil, OMTU - Turkey
- Prof. Shiao-Shing (Simon) Chen Ph.D, NTUT - Taiwan
- Prof. Peki Chen, Ph.D, NTUST - Taiwan
- Dr. Darmawan Napitupulu, IIS - Indonesia
- Dr. Mula Sigiro, Ph.D, UHN - Indonesia
- Dr. Mohd. Shahrman bin Adenan, UTM - Malaysia
- Dr. Tumad Lerggo Ginta, UTP - Malaysia
- Dr. Samsa Pandiangan, UHN - Indonesia
- Dr. Tumirul Gulzum, UNIMED - Indonesia

MORE INFORMATION

Website:
nicte.uhn.ac.id

Email :
nicte@uhn.ac.id

ORGANIZED BY
Engineering Faculty
Nommensen HKBP
University

SUPPORTED BY
CULS, Czech Republic
CYCU, Taiwan
CCU Taiwan
PT. PBN, Medan
NT Corp, Jakarta
Grab, Indonesia

Indexed By: Scopus



Compendex

INIS IET Inspec

NASA Astrophysics Data System
Chemical Abstracts Service

PAPER • OPEN ACCESS

2nd Nommensen International Conference on Technology and Engineering

To cite this article: 2018 *IOP Conf. Ser.: Mater. Sci. Eng.* **420** 011001

View the [article online](#) for updates and enhancements.

PREFACE

On behalf of the 2nd Nommensen International Conference on Technology and Engineering, I would like to welcome you all speakers and participants to our campus in Medan. This city is fascinating with its culinary tourism offering tropical fruit like durian and various food and cakes that spoil our tongue. Beside its culinary tourism, the city of Medan is close to a dynamic business city with relevant past in agriculture and plantation. We hope you will have the opportunity to enjoy the food and your time while staying in this city.

This conference is the second time the NICTE series was conducted by our university. The current theme is “Sustainable Engineering, and Technology Innovation and Application.” The theme is selected with the objective to bring more innovation in technology application to the current development in this city and the whole country of Indonesia. The great effort dedicated by our government to expedite the construction of massive infrastructures requires more technology innovation and application. Our contribution to this conference however small is also of valuable input to the current government effort in developing this country.

I would like to take this opportunity to thank all the committee, speakers, authors, reviewers and participants who dedicated their effort for the successful execution of this conference. Without your contribution, we simply could not have had this conference.

We received more than 140 submissions in this time. They came from various countries like Czech, Malaysia, Turkey and Russia in addition to those from Indonesia. We categorised the papers under seven groups, namely: Civil and Environmental Engineering, Mechanical Engineering and Technology, Electrical Engineering, Material Sciences and Engineering, Food and Agriculture Technology, Informatic Engineering and Technologies, Medical and Health Technology. Some papers can be categorised conveniently into one of these groups. Others bring their own difficulties because they might be put under more than one group. Still, the committee has done a great job to send your paper to the right reviewer. All papers regardless of their standing or initial classification, were available for general discussion at the task force meeting.

We are fortunate to have five distinguished keynote speakers at the moment. They are David Herak from CULS, Badorul Abu Bakar from USM Malaysia, Shyh Leh Chen from CCU Taiwan, Katsumi Suzuki from Shizuoka University Japan and Himsar Ambarita from USU Indonesia. David Herak is currently doing extensive work in biofuels and renewable energy. Badorul Abu Bakar interest is concrete technology and brick structures. Shyh Leh Chen has filed for a patent on active magnetic bearings. Katsumi Suzuki is leading research work on plant production and environmental agriculture. Himsar Ambarita currently leads a research centre focusing on sustainable energy and biomaterial. I would like to give thanks to the five of you for the interesting keynote speech at this conference.

Finally I hope that all participants enjoy a successful conference, make a lot of new contacts, engage in fruitful discussions and have a pleasant stay in Medan.

Richard AM. Napitupulu
2nd NICTE CHAIRMAN



2nd NICTE

Conference Organization

INITIATOR INSTITUTION

Faculty of Engineering
Nommensen HKBP University

ORGANIZING INSTITUTION

Universitas HKBP Nommensen
Czech University of Life Sciences Prague
National Chung Cheng University

Supporting Institution



Honorary Chair :

Ir. Nurdin Tampubolon, MM
Dr. Ir. Sabam Malau

International Advisory Board :

Prof. Menghui Li, CYCU – Taiwan
Prof. Cheng Yuan Chang, CYCU – Taiwan
Prof. Yupiter H P Manurung – Malaysia
Assoc. Prof. Jiri Masek, CULS – Czech Republic
Prof. Agustinus P Irawan, UNTAR – Indonesia

Editorial Board :

Assoc. Prof. Petr Valasek, PhD., CULS – Czech
Ing. Abraham Kabutey, PhD., CULS – Czech
Doc. Ing. Michal Petru, Ph.D, TUL – Czech
Assoc. Prof. Dr. Gurkan AK. Gundil, OMT – Turkey
Prof. Shiao-Shing Chen PhD, NTUT – Taiwan
Prof. Poki Chen, PhD., NTUST – Taiwan
Dr. Darmawan Napitupulu, LIPI – Indonesia
Dr. Mula Sigiro, PhD., UHN – Indonesia
Dr. Mohd. Shahrman bin Adenan, UiTM – Malaysia
Dr. Turnad Lenggo Ginta, UTP – Malaysia
Dr. Samse Pandiangan, UHN – Indonesia
Dr. Tumiur Gultom, UNIMED – Indonesia
Dr. Riko Arlando Saragih, UKM – Indonesia

Keynote Speakers

Prof. David Herak, PhD., CULS – Czech Republic
Prof. Katsumi Suzuki, PhD, Shizuoka University,
Japan
Assoc. Prof. Dr. Himsar Ambarita, USU, Indonesia

Reviewer :

Dr. Tumiur Gultom, UNIMED – Indonesia
Dr. Janter Simanjuntak, UNIMED – Indonesia
Dr. Rondang Tambun, USU – Indonesia
Prof. Dr. Dyah Herwindiati, UNTAR – Indonesia
Assoc. Prof. Dr. Hugeng, UMN – Indonesia
Dr. Mukhtar Panjaitan, UHN – Indonesia
Dr. Samse Pandiangan, UHN – Indonesia

Chairman :

Dr. Richard AM. Napitupulu, ST.MT.

Co-Chairman :

Dr. Ir. Sindak Hutaauruk, MSEE

Secretary :

Ir. Partahi Lumbangaol, M.Eng.Sc.

Panel & Scientific Session :

Dr. Mula Sigiro, PhD
Dr. Samse Pandiangan

Treasurer :

Yetty R. Saragih, ST.MT.

Committee Member :

Cand. Dr. Parulian Siagian, ST.MT.
Cand. Dr. Libianko Sianturi, ST. MT.
Cand. Dr. Ir. Timbang Pangaribuan, MT.
Cand. Dr. Charles Manurung, ST.MT.
Cand. Dr. Samar Tan, ST.M.Eng.

Prof. Shyh Leh Chen, CCU, Taiwan
Prof. Dr. Badorul Hisham Abubakar, USM,
Malaysia

Prof. Yupiter Manurung, UTM – Malaysia
Prof. Cheng Yuan Chan, CYCU – Taiwan
Prof. Shyh-Leh Chen, CCU – Taiwan
Dr. Gunawan Wang, BINUS – Indonesia
Dr. Sagir Alva, BINUS – Indonesia
Dr. Suganda Girsang, BINUS – Indonesia
Assoc. Prof. Petr Valasek, CULS – Czech

Dr. Sindak Hutauruk, UHN – Indonesia
 Dr. Richard AM. Napitupulu, UHN – Indonesia
 Himsar Ambarita, Dr.Eng., USU – Indonesia
 Prof. Hsieh, Hung-Nien PhD, Taiwan
 Dr. Janner Simarmata, UNIMED – Indonesia
 Dr. Sabam Malau, NHU – Indonesia
 Dr. Noverita Situmorang, USU - Indonesia
 Dr. Tulus B. Sitorus, USU - Indonesia
 Dr. Emil Kaburuan, BINUS – Indonesia
 Dr. Azridjal Aziz, UNRI – Indonesia
 Dr. dr. Jenny Ria, NHU – Indonesia
 Dr. Sfenrianto, BINUS – Indonesia

Dr. Dedi Trisnawarman, UNTAR – Indonesia
 Ing. Abraham Kabutey, PhD., CULS – Czech
 Dr. Hotman Manurung, UHN – Indonesia
 Samar Tan, MEng, ISTP – Indonesia
 dr. Novita S. MSc, NHU – Indonesia
 Robbi Rahim MT, ITM – Indonesia
 Partahi Lumbangaol MEng, UHN – Indonesia
 Timbang Pangaribuan MT, UHN – Indonesia
 Charles Manurung, MT, UHN – Indonesia
 Yetti Riris Saragi MT, UHN – Indonesia
 Pandapotan Siagian MSc, ITDel – Indonesia
 Ir. Rosnawya S, MSc, UHN - Indonesia

Administrative and Supporting Staff :

Roslin Pasaribu
 Parulian Sirait, S.Kom.
 Ellis Sirait
 Poltak Siahaan
 Sungguh Rahmat Bohalima
 Dodi Siahaan
 Oinike Hutajulu
 Delfrida Purba
 Anggreini Sibarani
 Hengky Manurung

Wandro Siregar
 Andre Sahat Gultom
 Rohancen B Barus
 Joel B Sipayung
 Septiani Silitonga
 Petra Junita Laia
 Hanno Anugrah Zai
 Hengky Manurung
 Rosmin Siadari
 Prengky J Simanungkalit



PAPER • OPEN ACCESS

Failure mode analysis of ramie fiber reinforced composite material

To cite this article: Agustinus Purna Irawan 2018 *IOP Conf. Ser.: Mater. Sci. Eng.* **420** 012060

View the [article online](#) for updates and enhancements.

Failure mode analysis of ramie fiber reinforced composite material

Agustinus Purna Irawan*

Mechanical Engineering Department, Faculty of Engineering, Universitas Tarumanagara, Jakarta

* agustinus@untar.ac.id

Abstract. This study aims to determine the failure mode of ramie fiber reinforced epoxy composite materials (RFRECM). The method used is testing the composite test sample that includes tensile test according to ASTM D 3039/D3039M, compression test according to ASTM D 695, simulation by using computer software, and morphology analysis by using Scanning Electron Microscope (SEM). The results show that RFRECM has $SR \geq 1$ for failure criteria derived from stress theory, strain theory, and Tsai-Wu criteria, while having $SR < 1$ only for the criteria of Tsai-Hill. Theoretically, the epoxy flax fiber composite has good strength in fiber or longitudinal direction (0°) and decreases with the addition of the angle of the fiber. The failure mode of RFRECM is caused by voids, initial cracks, delamination and debonding occurring between 5-10% of the total area observed in the test sample. This condition can occur in all test samples as a result of imperfections of the fabrication process.

1. Introduction

One of the main problems in the development of natural fiber reinforced composite materials is knowing the failure mode, so it can be a reference in the process of loading given to components made of natural fiber reinforced composite materials. In general, the composite structure is said to fail when the structure cannot function properly. Thus, the definition of failure differs according to different needs. For the application of certain structures, small deformations are often considered to be a failure, while in other structures only total damage can be considered a failure [1], [2], [3], [4]. The microscopic internal damage of the composite material cannot be easily observed directly in plain view. Damage can occur long before the damage is apparent. Microscopic internal damage includes fiber breaking, microcrack matrix, debonding and delamination [5], [6], [7], [8]. The fiber may break because of the load it receives. If the matrix is capable of accepting a shear force and passing it to the surrounding fibers, the broken fibers will become more numerous resulting in cracks, which further leads to brittle failure. If the matrix is unable to accept the shear stress concentration that arises at the end of the broken fibers, the fibers can be detached from the matrix (in a process called debonding). The combination of the types of failure with broken fibers above occurs in any place accompanied by damage to the matrix causing brush-type damage [6], [7], [10], [11]. This type of microscopic internal damage cannot be visually observed at all, and is only visible when the frequency of damage is large enough in the same place. Therefore, in actual conditions, it is very difficult to determine when a composite material is declared damaged or failed. In most structural cases, the composite material fails when the material has been completely damaged, or the stress-strain curve shown is no longer linear. This condition applies both to lamina and laminate [6], [7], [8]. This study aims to determine the failure mode of RFRECM, by using the criteria of failure of maximum stress theory, maximum strain



theory, Tsai Hill criterion and Tsai Wu criterion, so it can be used as a reference in designing components using RFRECM. An understanding of the failure mode can be used to anticipate failure of components made with RFRECM, making the process a lot safer to do.

2. Method and materials

2.1. Sample preparation

Samples of composite materials were prepared by using ramie fibers with epoxy matrix (RFRECM). Composite materials are manufactured by using hand lay up and laminate mat methods [12], [13], [14], [15].

2.2. Mechanical properties testing

RFRECM sample that has been made has its mechanical characteristics tested according to tests as follows Tabel 1.

Table 1. Mechanical properties testing [8], [9]

No.	Strength	Standard
1.	Tensile Strength	ASTM D3039/D3039M
2.	Shear Strength	ASTM D4255M-83
3.	Compressive Strength	ASTM D695

2.3. Calculation of failure criteria using software

By using the result data of mechanical characteristics we and calculation of strength using composite micromechanical equation, strength ratio and failure criterion from RFRECM can be obtained by using Promal Composite Software [7].

2.4. Morphological analysis of RFRECM by scanning electron microscope

The result of this research is equipped with morphological analysis by using SEM to get interface information between the fiber and the matrix, so that the failure mode of RFRECM can be known [6], [7], [8], [9].

2.5. Maximum stress theory

In this criterion, lamina failure occurs when one of the stresses σ_1 , σ_2 , and τ_{12} reaches the allowable amount of stress.

$$\begin{aligned} -(\sigma_1^C)_{ult} < \sigma_1 < (\sigma_1^T)_{ult} \text{ or} \\ -(\sigma_2^C)_{ult} < \sigma_2 < (\sigma_2^T)_{ult} \text{ or} \\ -(\tau_{12})_{ult} < \tau_{12} < (\tau_{12})_{ult} \end{aligned} \quad (1)$$

2.6. Maximum strain theory

In this criterion, lamina failure occurs when one of the strain components ε_1 , ε_2 , and ε_{12} reaches the allowable amount of strain.

$$\begin{aligned} -(\varepsilon_1^C)_{ult} < \varepsilon_1 < (\varepsilon_1^T)_{ult} \text{ or} \\ -(\varepsilon_2^C)_{ult} < \varepsilon_2 < (\varepsilon_2^T)_{ult} \text{ or} \\ -(\gamma_{12})_{ult} < \gamma_{12} < (\gamma_{12})_{ult} \end{aligned} \quad (2)$$

2.7. Tsai Hillcriterion

This criterion was developed based on distortion energy failure theory by Von Mises for anisotropic materials. For orthotropic lamina, this criterion becomes:

$$\left[\frac{\sigma_1}{(\sigma_1^T)_{ult}} \right]^2 - \left[\frac{\sigma_1 \sigma_2}{(\sigma_1^T)_{ult}^2} \right] + \left[\frac{\sigma_2}{(\sigma_2^T)_{ult}} \right]^2 + \left[\frac{\tau_{12}}{(\tau_{12})_{ult}} \right]^2 < 1 \quad (3)$$

2.8. Tsai Wucriterion

This criterion was developed based on total strain energy failure theory by Bestrami. This theory is applied to determine stresses on the lamina.

$$H_1 \sigma_1 + H_2 \sigma_2 + H_6 \tau_{12} + H_{11} \sigma_1^2 + H_{22} \sigma_2^2 + H_{66} \tau_{12}^2 + 2H_{12} \sigma_1 \sigma_2 < 1 \quad (4)$$

$$\text{with: } H_1 = \frac{1}{(\sigma_1^T)_{ult}} - \frac{1}{(\sigma_1^C)_{ult}}, \quad H_{11} = \frac{1}{(\sigma_1^T)_{ult}(\sigma_1^C)_{ult}}$$

$$H_2 = \frac{1}{(\sigma_2^T)_{ult}} - \frac{1}{(\sigma_2^C)_{ult}}, \quad H_{22} = \frac{1}{(\sigma_2^T)_{ult}(\sigma_2^C)_{ult}}, \quad H_{12} = -\frac{1}{2(\sigma_1^T)_{ult}^2}$$

$$H_6 = 0, \quad H_{66} = \frac{1}{(\tau_{12})_{ult}^2}$$

3. Results and discussion

3.1. Strength Ratio

Table 2. Summary of lamina micromechanical calculations

No.	Vf	σ_1 (MPa)	σ_2 (MPa)	τ_{12} (MPa)	E_1 (GPa)	E_2 (GPa)	G_{12} (GPa)	ν_{12}	ϵ_1	ϵ_2	γ_{12}
1	0.1	131	46	12	5.1	3.2	1.2	0.290	0.02587	0.01439	0.0099
2	0.2	179	41	13	7.2	3.5	1.4	0.280	0.02473	0.01165	0.0099
3	0.3	226	38	15	9.4	3.9	1.5	0.270	0.02412	0.00955	0.0099
4	0.4	274	35	17	11.5	4.5	1.7	0.260	0.02374	0.00778	0.0099
5	0.5	322	32	20	13.7	5.2	2.0	0.250	0.02348	0.00622	0.0099

Note:

Ramie fiber: $\sigma_f = 560$ MPa, $\tau_f = 36$ MPa, $E_f = 24.5$ GPa, $\epsilon_f = 0.0287$

Epoxy Matrix: $\sigma_m = 40$ MPa, $\tau_m = 34$ MPa, $E_m = 2.9$ GPa, $\epsilon_m = 0.021$

Strength Ratio (SR) is the ratio between the load that can be accepted by the composite structure and the given load [7].

$$SR = \frac{\text{Maximum load which can be applied}}{\text{load applied}} \quad (5)$$

The analysis by using SR is as follows:

- If $SR > 1$, the lamina is safe and can accept the load
- If $SR < 1$, the lamina is not safe and cannot accept the load
- If $SR = 1$, the lamina is not safe in accepting the load and is damaged.

Based on the test results of RFRECM and analysis using the Promal Software [7] and use equation (5), graph of the relationship between SR and fiber orientation can be made referring to some failure theory.


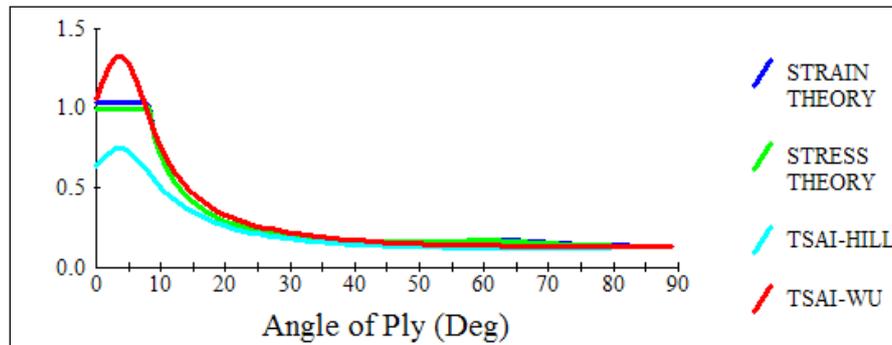


Figure 1. Strength Ratio (SR) of RFRECM

Based on Figure 1, the RFRECM has $SR \geq 1$ for three failure criterias and $SR < 1$ only for the Tsai-Hill failure criteria. Thus, RFRECM is theoretically capable of coping stress or strain and will not fail as long as the applied load does not exceed the maximum limit. In this case, it is necessary to set the maximum limit of load acceptable to the RFRECM. In accordance with theoretical studies, in the direction of longitudinal fiber (0°), the fiber's ability to receive the load is excellent; however it will decrease along with changes in fiber orientation [17], [18], [19].

3.2. RFRECM failure mode

By using Promal Software [7] and use equation (1), (2), (3), (4), the failure envelope of RFRECM based on the four failure criterias can be described as one graph based on the following fiber orientation.

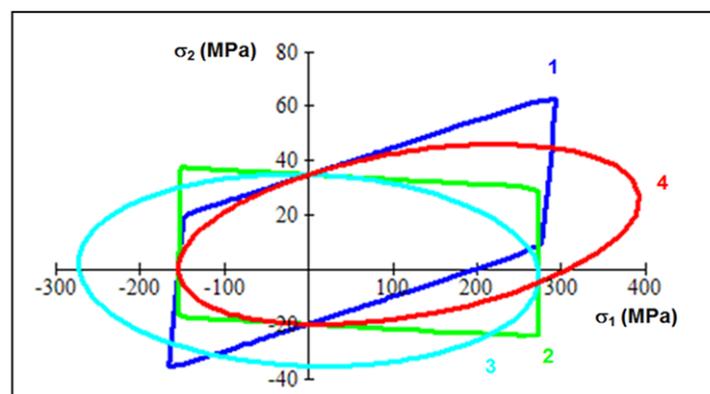


(1) Maximum stress theory; (2) Maximum strain theory;
(3) Tsai – Hill criterion; (4) Tsai – Wu criterion

Figure 2. Failure envelope of RFRECM (0°)

Based on the envelope image of lamina failure (Figure 2), it is seen that in the fiber orientation 0° (longitudinal), the fiber's handling of both the compressive load (positive X


axis) and the compressive load (negative X axis) has greater value when compared to the same aspect in Y axis direction. This applies to all failure criteria. Lamina will fail in accordance with each criterion of failure if the received stress goes beyond the outer limit of each envelope. Lamina will be able to safely receive the load when the actual stress is still in the envelope [7], [20], [21], [22].

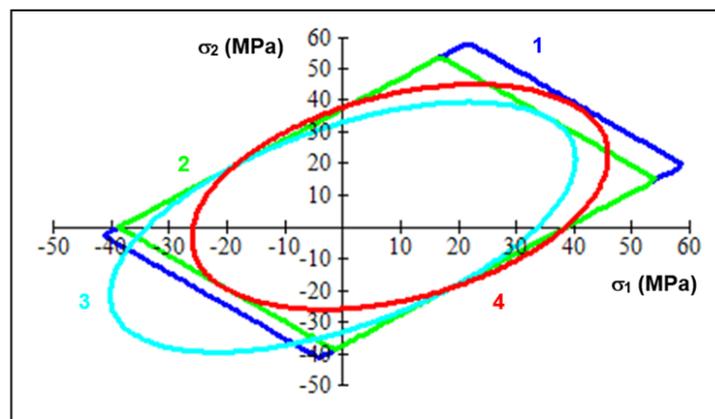

(1) Maximum stress theory; (2) Maximum strain theory;
(3) Tsai – Hill criterion; (4) Tsai – Wu criterion

Figure 3. Failure envelope of RFRECM ($\pm 45^\circ$)

In the fiber orientation $\pm 45^\circ$, based on the failure envelope (Figure 3), it is seen that the lamina's ability to receive loads in the direction of $\pm 45^\circ$ decreases when compared to the capability at the angle of 0° . This applies to all failure criteria, either for tensile loads or directional tap X axis. Differences in the ability to with stand X-axis and Y-axis are not too large and tend to have the same value. This condition occurs because the load received by the lamina is distributed in a balance toward $\pm 45^\circ$, although its ability is lower than the 0° angle.

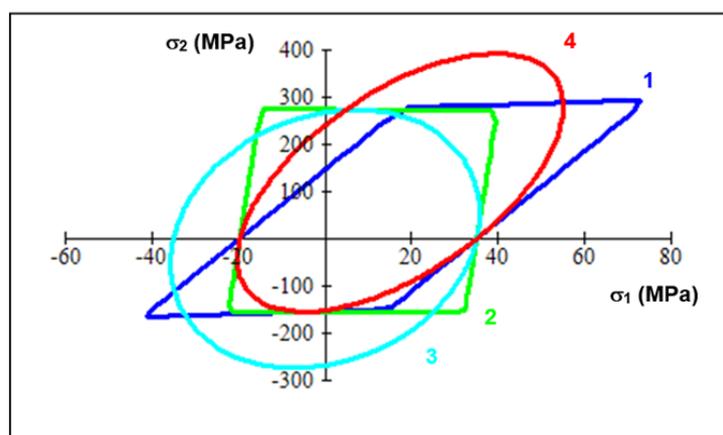

(1) Maximum stress theory; (2) Maximum strain theory;
(3) Tsai – Hill criterion; (4) Tsai – Wu criterion

Figure 4. Failure envelope of RFRECM ($\pm 90^\circ$)

In fiber orientation 90^0 (Figure 4), lamina is able to accept larger quantity of load occurring on the Y axis, compared to the X axis. Thus, it can be concluded that the unidirectional loading of fiber will result in greater lamina strength to accept the load. As a result, the design of the loading direction of the lamina is cultivated in the direction of the fibers, which helps making the lamina not susceptible to damage due to the received load [6], [7], [9].

3.3. Morphological analysis of RFRECM by scanning electron microscope

The structure is declared to fail if it can no longer work properly. The definition of engineering material failure differs according to the application requirements of the product. For the application of certain structures, small deformations can already be considered a failure, while in the other structures, only total damage can be considered one. In composite materials, microscopic internal damage can occur long before the real damage is apparent. This microscopic internal damage occurs in several forms, such as fiber breaking, voids, matrix microcracks, debonding, and delamination [6], [7], [8], [9], [17], [20]. To obtain more real information on RFRECM damage mode, SEM (Scanning Electron Microscope) photos are used to observe delamination, debonding and void events of the test samples (Figure 5).

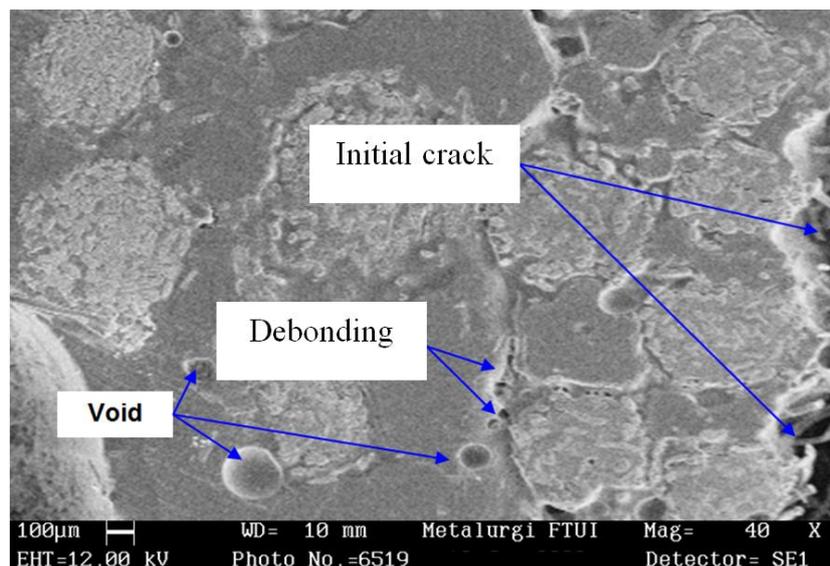


Figure 5. Morphological analysis of RFRECM by SEM

Table 3. Result of morphological analysis of RFRECM by SEM

No.	Failure mode	% damage to total observation area
1	Initial crack	$\pm 10\%$
2	Void	$\pm 10\%$
3	Debonding	$\pm 5\%$

In laminates with low fiber volume fraction (10-20%), there is a case of micro-cracking as a result of less strong bond between the composite layer and matrix. This occurs because in laminates with a small fraction of fiber volume ($V_f < 20\%$), the strength of the ramie fiber

does not significantly affect the overall composite strength. The strength of the laminate composite is still influenced by the strength of the matrix. As a result of RFRECM with low fiber volume fraction, the failure occurs and the laminate becomes brittle. In laminate with medium fiber volume fraction between 30-40%, composite strength has been dominated by the strength of ramie fiber as a composite reinforcement. At Vf 30-40%, the bond between the fiber and the matrix is strong because the matrix is able to moisten the entire fiber perfectly, thereby greatly affect the final strength of the composite formed. The fracture form of the test sample is splitted in multiple areas, indicating the RFRECM with Vf 30-40% has good elastic strength and modulus. Damage does not occur in one place, but in many places in the form of fractures. At a high fraction of fiber volume (50%), the number of pre-delamination and voids occurring in RFRECM increases considerably. The matrix is unable to lubricate the entire fiber perfectly, so the bond between the fiber and the matrix is not strong. In these conditions, there is a lot of empty space that causes air to get trapped and therefore voids are produced. If the fiber is not dampened perfectly by the matrix, the bond between the fiber and the matrix becomes imperfect. In this case, the composite layer will easily experience debonding and delamination. Along with the occurrence of delamination and debonding, the composite strength also decreased [7], [15], [16], [17].

4. Conclusion

RFRECM has $SR \geq 1$ for three failure criterias and $SR < 1$ only for the Tsai-Hill failure criteria, which means that it has good strength, but will fail if the applied load exceeds the maximum limit of load. In accordance with theoretical studies, in the direction of longitudinal fiber (0°), the fiber's ability to receive the load is excellent, however, it will decrease along with changes in fiber orientation [6], [7], [16], [17], [20]. RFRECM failure mode occurs due to voids, initial cracks, delamination, and debonding that take place between 5-10% of the total area observed in the test sample. This condition can happen due to imperfection of fabrication process by using hand lay up method at room temperature, in vacuum process with no pressure. With the imperfection of the fabrication process, ideal conditions such as the law of mixtures are difficult to obtain. In RFRECM fabrication process with hand lay up method, there are fabrication imperfections. Three major phenomena are successfully observed, either by direct observation of the test sample, fabrication process, and observation using SEM and macro photo aid. Therefore, it can be concluded that it is necessary to give correction factor to void, initial crack, and debonding to RFRECM.

4. References

- [1] Irawan, A.P., Fediyanto, Tandi, S. 2006 *Proceedings of Ergo Future* vol. 1 pp. 337-341.
- [2] Nguong, C.W., Lee, S.N.B., Sujana, D. 2013 *International Journal of Materials and Metallurgical Engineering* 7-1-52.
- [3] Irawan, A.P., Halim, H., Kurniawan, H. 2017 *IOP Conference Series: Materials Science and Engineering*. vol. 237. pp. 1-8.
- [4] Pamuk, G. 2016 *Tekstilec* **59**-3-237.
- [5] Zhou, X., Ghaffar, S.H., Dong, W., Oladiran, O., Fan, M. 2013 *Materials and Design* **49**-35.
- [6] Hadi, B.K., 2000 *Mekanika Struktur Komposit* (Bandung: Penerbit ITB)
- [7] Autar K Kaw, A.K., 1997 *Mechanics of Composite Materials* (New York: CRC Press)
- [8] ASTM., 2013 *Annual Book of ASTM Standard* (West Conshohocken)

- [9] ASTM International, 2012 *The Composite Materials Handbook MIL 17*(West Conshohocken).
- [10] G. Venkatesha Prasanna, G.V., Subbaiah, V., 2013 *Malaysian Polymer Journal***8**-1-38.
- [11] Brouwer, W.D. 2000 *On the Occasion of the Joint FAO/CFC Seminar*(Rome, Italy).
- [12] Irawan, A.P., Soemardi, T.P., Widjajalaksmi, K., Reksoprodjo, A.H.S.,2009 *Jurnal Teknik Mesin UK. Petra***11**-1-41.
- [13] Irawan, A.P., Soemardi, T.P., Widjajalaksmi, K., Reksoprodjo, A.H.S.,2011 *Jurnal Teknik Mesin ITS* **11**-1-1.
- [14] Irawan, A.P., Daywin, F.J., Fanando, Agustino, T. 2016 *International Journal of Engineering and Technology* **8**-3-1543-1550
- [15] Irawan, A.P., Sukania, I.W., 2011 *International Conference on Innovation in Polymer Science and Technology* vol 1-64 (Denpasar-Bali).
- [16] Irawan, A.P., Soemardi, T.P., Widjajalaksmi, K., Reksoprodjo, A.H.S., 2011 *International Journal of Mechanical and Material Engineering*. **6**-1-46.
- [17] Irawan, A.P., Sukania, I.W., 2012 *Proceeding of 2nd International Conference on Sustainable Technology Development* M.109-M.115 (Denpasar-Bali).
- [18] Maleque, M.A.,Belal, F.Y.,Sapuan,S.M., 2007 *The Arabian Journal for Science and Engineering* **32**-2b-359.
- [19] Prasanna, G.V., Subbaiah, K.V., 2013 *Malaysian Polymer Journal*, **8**-1-38.
- [20] Irawan, A.P., Soemardi, T.P., Widjajalaksmi, K., Reksoprodjo, A.H.S.,2010 *International Conference APHCI Ergofuture 2010* (Denpasar Bali Indonesia)
- [21] Onal, L., Karaduman, Y., 2009 *Journal of Composite Materials* **43**-1.
- [22] Mishra, P. 2012 *International Journal of Applied Research in Mechanical Engineering* **2**- 2.



Source details

IOP Conference Series: Materials Science and Engineering

Scopus coverage years: from 2009 to Present

ISSN: 1757-8981 E-ISSN: 1757-899X

Subject area: [Engineering: General Engineering](#) [Materials Science: General Materials Science](#)

CiteScore 2018

0.53



SJR 2018

0.192



SNIP 2018

0.531



[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Journal Homepage](#)

[CiteScore](#) [CiteScore rank & trend](#) [CiteScore presets](#) [Scopus content coverage](#)

Year	Documents published	Actions
2020	8,780 documents	View citation overview >
2019	20,504 documents	View citation overview >
2018	15,811 documents	View citation overview >
2017	8,740 documents	View citation overview >
2016	3,676 documents	View citation overview >
2015	2,253 documents	View citation overview >
2014	932 documents	View citation overview >
2013	621 documents	View citation overview >
2012	595 documents	View citation overview >
2011	800 documents	View citation overview >
2010	79 documents	View citation overview >
2009	180 documents	View citation overview >

About Scopus

- [What is Scopus](#)
- [Content coverage](#)
- [Scopus blog](#)
- [Scopus API](#)
- [Privacy matters](#)

Language

- [日本語に切り替える](#)
- [切换到简体中文](#)
- [切换到繁體中文](#)
- [Русский язык](#)

Customer Service

- [Help](#)
- [Contact us](#)



IOP Conference Series: Materials Science and Engineering

Country
Subject Area and Category

United Kingdom - SIR Ranking of United Kingdom
Engineering
Engineering (miscellaneous)
Materials Science
Materials Science (miscellaneous)

24

H Index

Publisher

Publication type

Conferences and Proceedings

ISSN

17578981, 1757899X

Coverage

2009-ongoing

Scope

The open access IOP Conference Series provides a fast, versatile and cost-effective proceedings publication service for your conference. Key publishing subject areas include: physics, materials science, environmental science, bioscience, engineering, computational science and mathematics.



[Homepage](#)








[How to publish in this journal](#)

[Contact](#)



[Join the conversation about this journal](#)



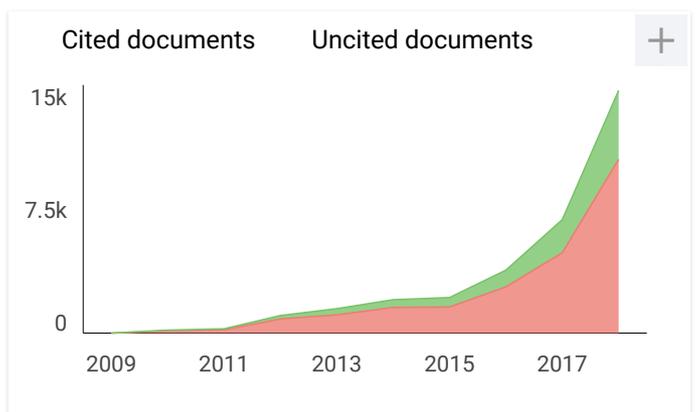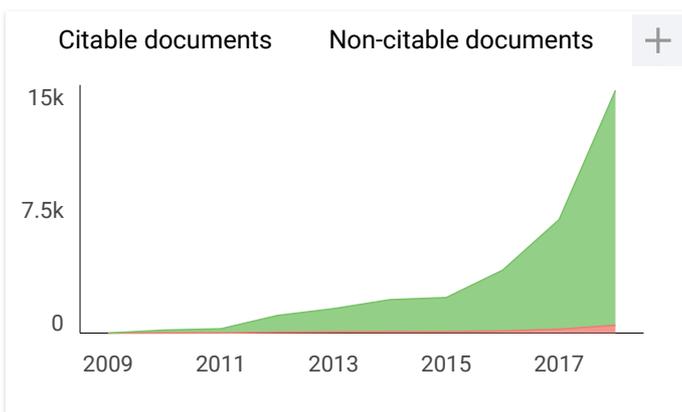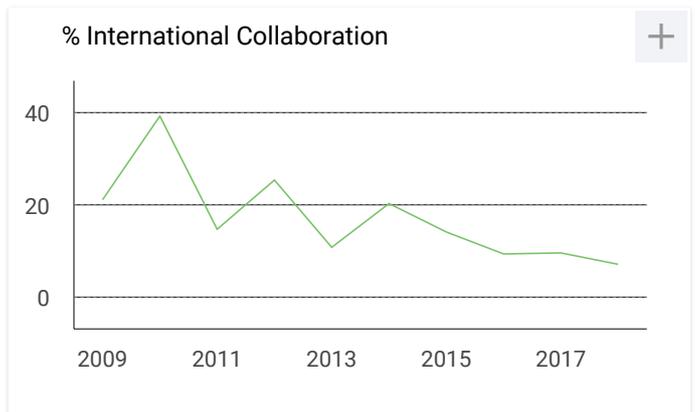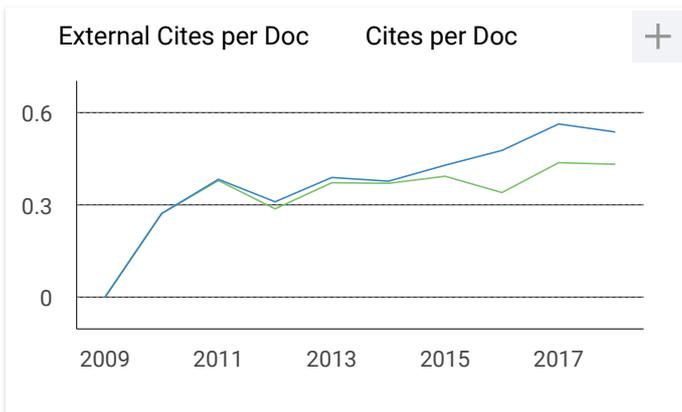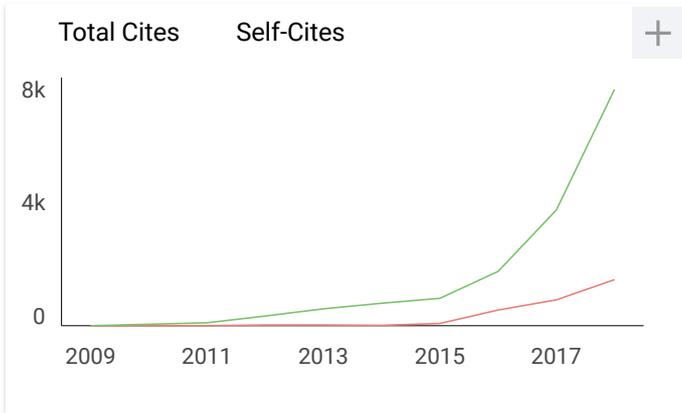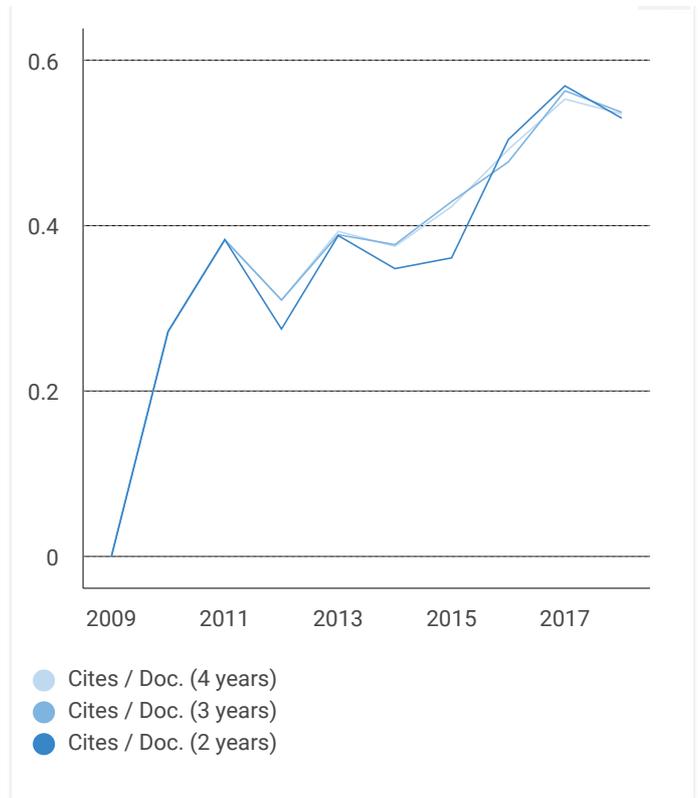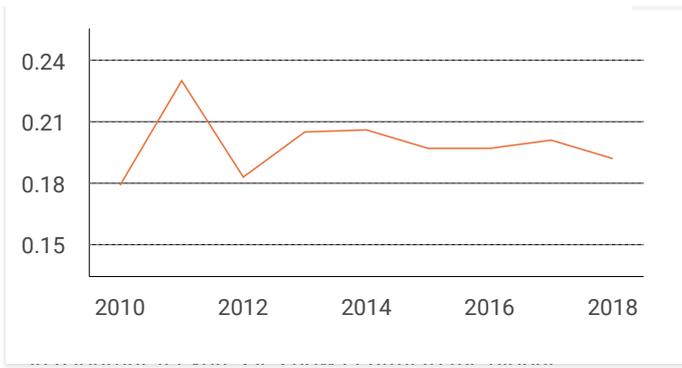

**IOP Conference Series:
Materials Science and...**

Not yet assigned
quartile

SJR 2018
0.19

powered by scimagojr.com

← Show this widget in
your own website

Just copy the code below
and paste within your html
code:

```
<a href="https://www.scimaç
```